


Cylinder with Lock: With Lock Status Indication

Ø 32, Ø 40, Ø 50, Ø 63, Ø 80, Ø 100

Safety Measure

Whether the cylinder is in a locked or manual lock released state can be visually confirmed at a glance.


The high visibility of the **lock released state indication label** allows for easy confirmation of the lock released state, even from a distance.

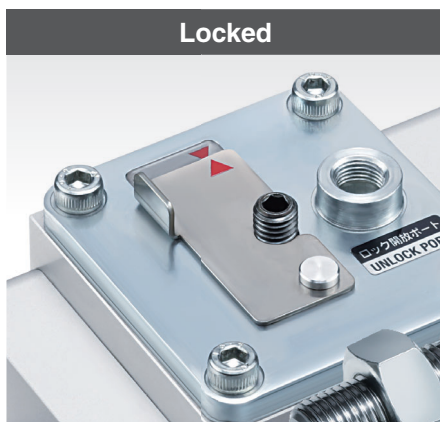


Locked

Available with a cap nut

Prevents the adhesion of spatter, foreign matter, etc.

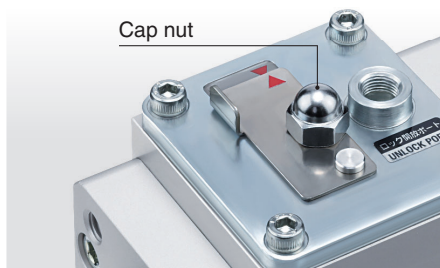

Cap nut

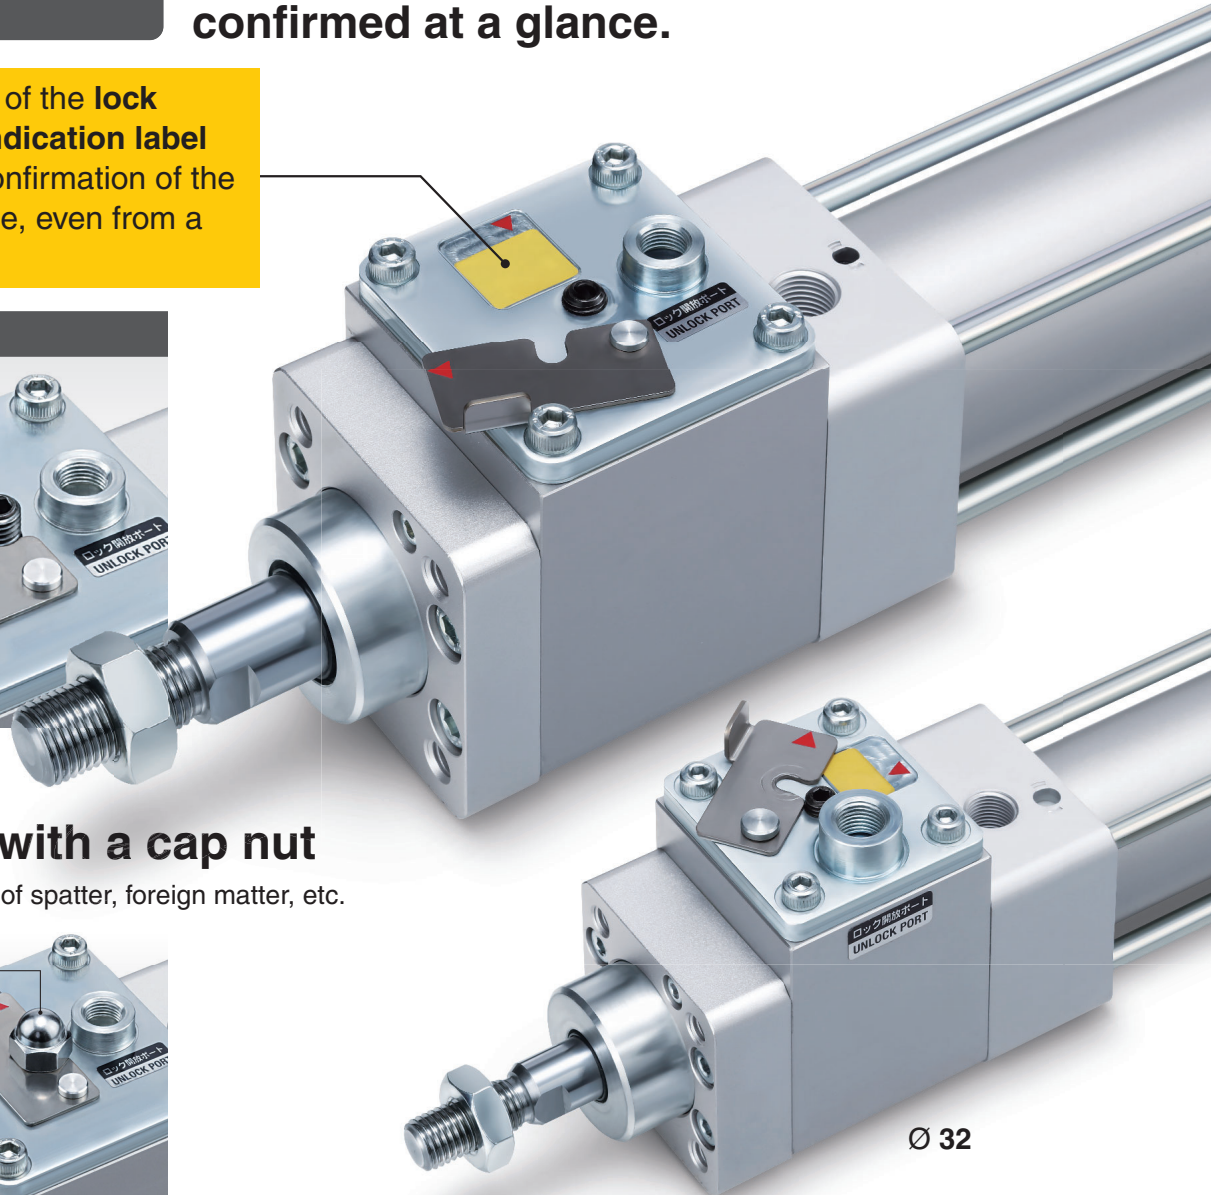

How to Order

C96N Standard model no.

C96N Lock unit
Standard model no. *1

*1 The lock unit is the same as that for the MWB-X3030 (G port).

The specifications and dimensions are the same as those of the standard C96N series model.
Not applicable to the CP96N

C96N-X3030 □

- **X3030** **A**

Option

A	Without option
B	With cap nut
C	With coil scraper
D	With coil scraper + cap nut

* The model with a coil scraper is the same as the MWB-XC35.

• With lock status indication




20-EU759-UK

Changing from the manual lock released state to the locked state



1 Turn the lock release bolt counterclockwise.

1. Continue to turn the bolt counterclockwise until the groove in the middle of the lock release bolt is completely above the body surface.

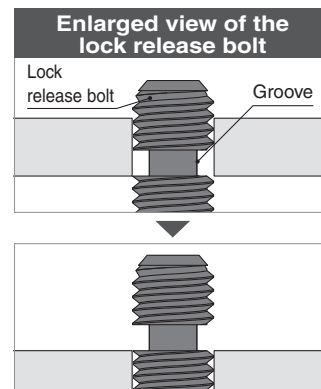



2 Align the groove and the locked state indication plate.

1. Insert the locked state indication plate into the groove in the bolt and align the orientation marks until the lock released state indication label (yellow) is no longer visible.

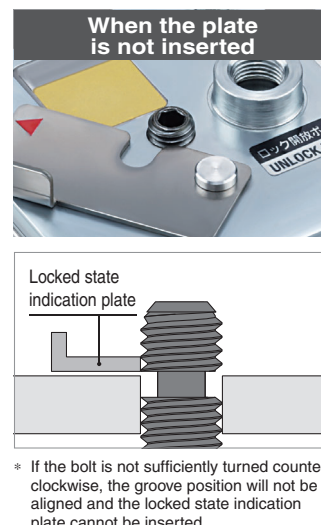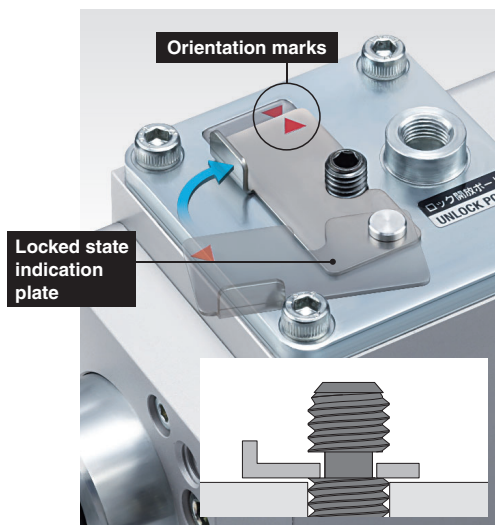

3 Secure the locked state indication plate.

1. Continue to turn the lock release bolt counterclockwise.
2. The locked state indication plate will move upward, securing it.
3. Confirm that the locked state indication plate does not move.

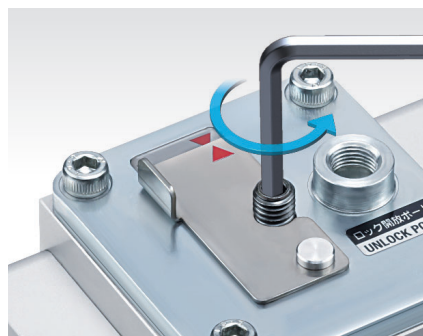

⚠ Caution

Before operating the cylinder, be sure to first carry out a test operation to check for operation abnormalities as stated in the precautions in the C(P)96N Series Operation Manual on the SMC website.

SMC Corporation

SMC CORPORATION
Akihabara UDX 15F, 4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, JAPAN
Phone: 03-5207-8249 FAX: 03-5298-5362
SMC CORPORATION All Rights Reserved

European Marketing Centre (EMC)

Zuazobidea 14, 01015 Vitoria
Tel: +34 945-184 100 Fax: +34 945-184 124
URL <http://www.smc.eu>