



# Air Gripper Unit for Collaborative Robots

Compliant with the TM Series  
OMRON Corporation collaborative robot  
and the TM Series  
TECHMAN ROBOT Inc. collaborative robot

Plug and Play  
configuration for immediate use

TMComponent Easy programming

TMPlug&Play  
CERTIFIED



## JMHZ2-X7400B-TM



More information  
can be viewed here.

P-E20-19

# Plug and Play

## Air Gripper Unit for Collaborative Robots

OMRON Corporation and TECHMAN ROBOT Inc.

TM5, TM12, and TM14 compliant



- Compact, lightweight product with high gripping force due to air operation
- An air gripper that realizes high rigidity and high precision due to its guide-integrated construction

With high-precision linear guide


**Repeatability:  $\pm 0.01$  mm**

Linear guide of the higher rigidity and precision is used.

**Higher rigidity** (Compared with the same size of the existing MHZ2)

- Operate by simply connecting 1 air supply tube and an electrical wiring M8 connector.
- Integrated solenoid valve, speed adjustment mechanism, and auto switch
- TMComponent
- A split protective cover for easy air gripper maintenance  
Allows you to maintain the air gripper without removing the user-specific attachment

### Component Parts

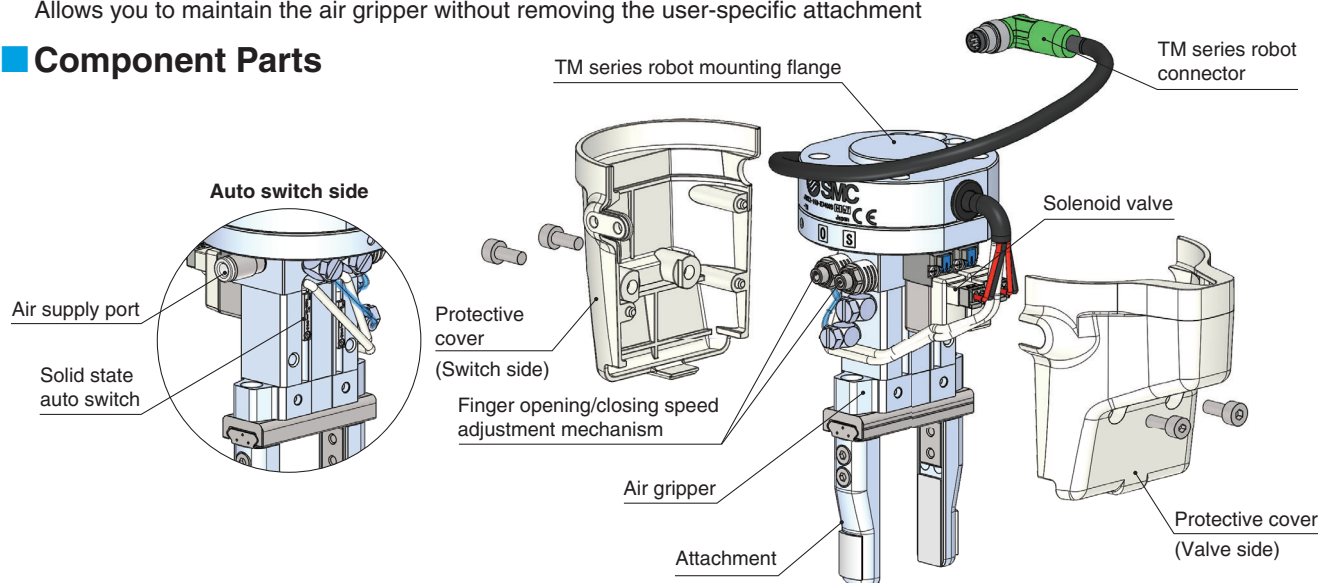

### How to Order



**JMHZ2-16D-X7400B-TM**

### Specifications

Bore size [mm]		16
Fluid		Air
Action		Double acting
Operating pressure [MPa]		0.1 to 0.7
Repeatability [mm]		±0.01
Number of fingers		2
Gripping force	External	32.7
Effective value per finger [N]	Internal	43.5
Opening/Closing stroke (Both sides) [mm]		10
Weight [g]		430
Standards		ISO 9409-1-50-4-M6
Auto switch model		D-M9N-5
Connector type		M8 8-pin connector (Plug)

■ Included parts: Piping tube (2 m)


## Model Selection

### Gripping force


#### ● Indication of effective gripping force

The gripping force shown in the graphs below represents the gripping force of one finger when all fingers and attachments are in contact with the workpiece. **F** = One finger thrust

#### External gripping force

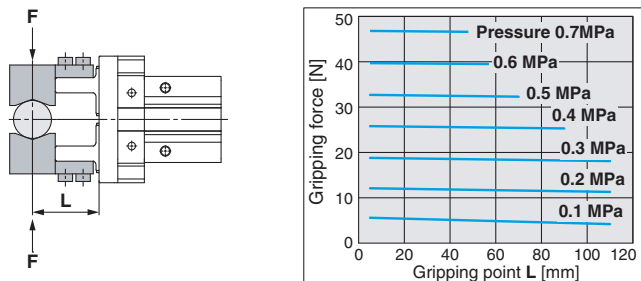


#### Internal gripping force

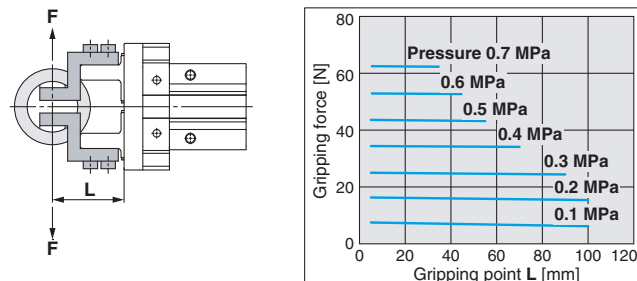


### Gripping point

- The air gripper should be operated so that the workpiece gripping point "L" and the amount of overhang "H" stay within the range shown for each operating pressure given in the graphs below.
- If the workpiece gripping point goes beyond the range limits, this will have an adverse effect on the life of the air gripper.


#### External grip

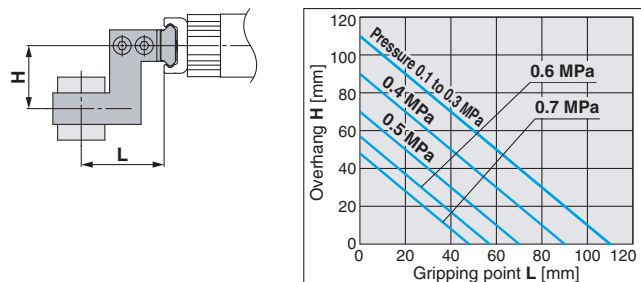

#### Internal grip

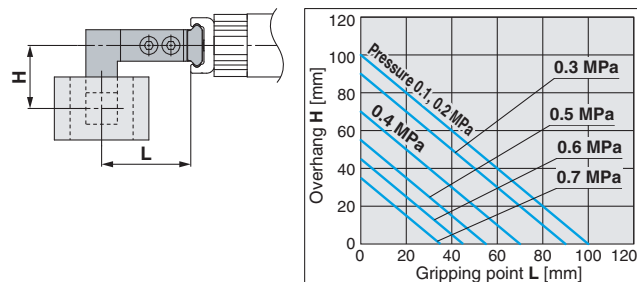

## Dimensions

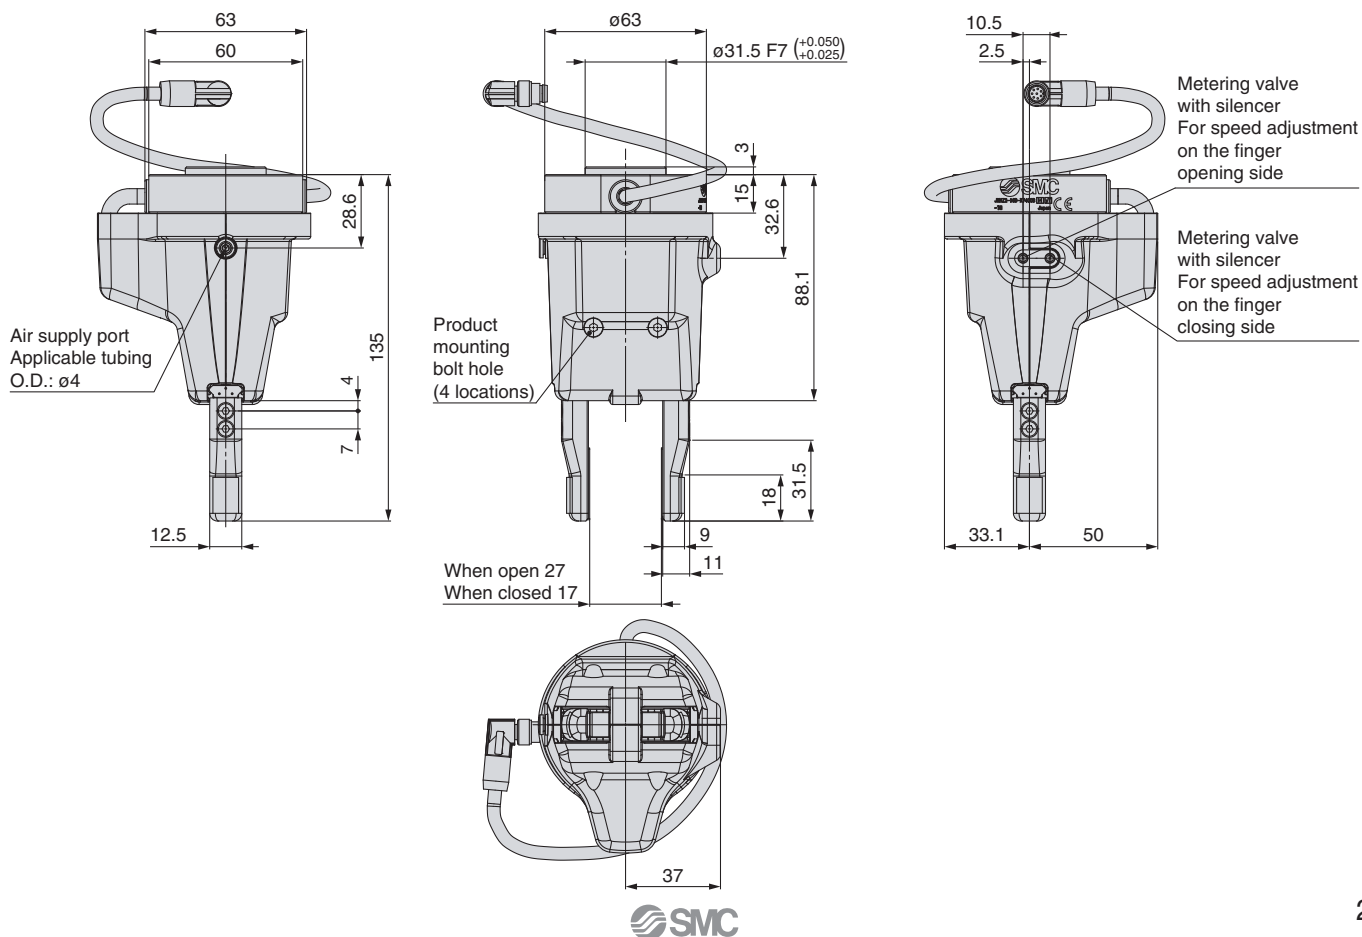

# TMComponent

More information  
on the TMComponent  
software can be  
viewed here.





## Easy programming

Using the certified software TMComponent of OMRON Corporation and TECHMAN ROBOT Inc., various operations and sensor signals can be easily programmed by using a control box equipped with the dedicated software tool “TMflow” or by using graphical flowcharts on a Windows computer.

You can easily install the software by inserting a USB with the TMComponent software package into a control box or Windows computer.

\* Please download the TMComponent software package from the SMC website, and save it to a USB memory.

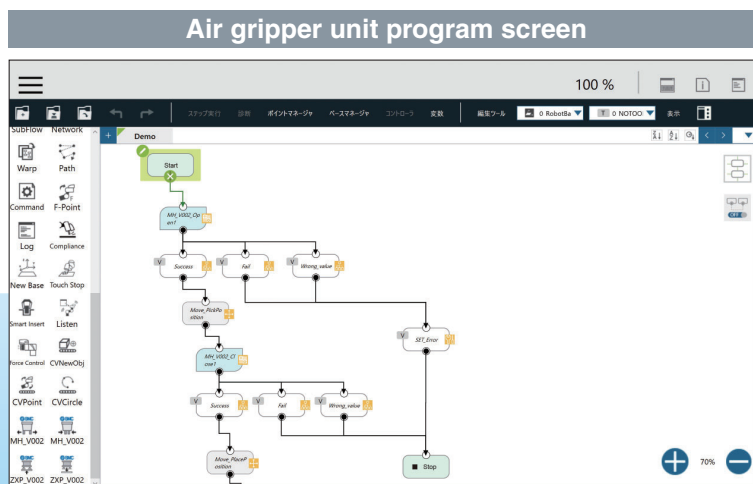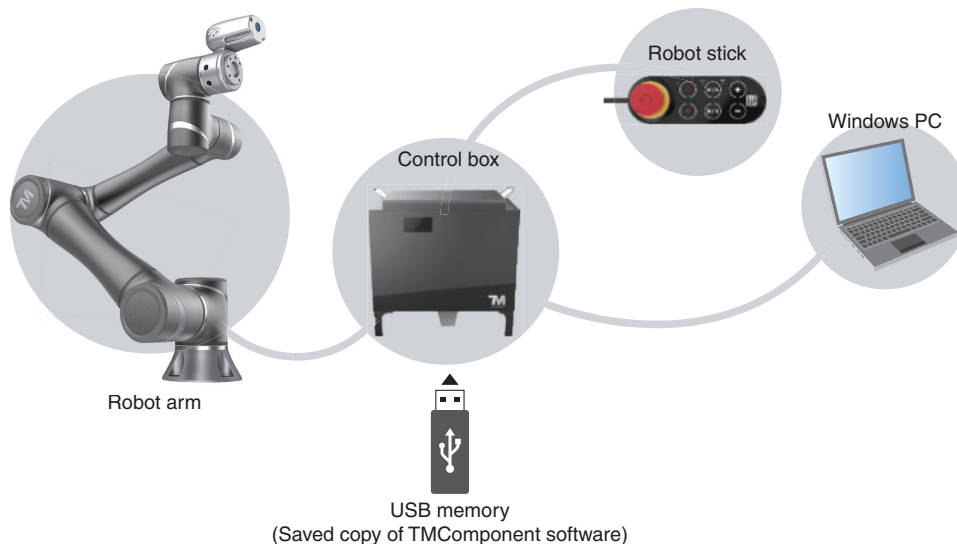

**Safety Instructions** Be sure to read the “Handling Precautions for SMC Products” (M-E03-3) and “Operation Manual” before use.

## SMC Corporation

Akihabara UDX 15F,  
4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, JAPAN  
Phone: 03-5207-8249 Fax: 03-5298-5362  
<https://www.smcworld.com>  
© 2021 SMC Corporation All Rights Reserved

Specifications are subject to change without prior notice  
and any obligation on the part of the manufacturer.

D-G

Printing ZO 7810KY Printed in Japan.